Llano Masonry

4801 122nd Lubbock, TX 79424 806-771-9510

Submittals

Project: Texas Tech University Chapel

Architect: McKinney York Architects

General contractor: Western Builders

Specification: 044300-5

Item: stone anchors


Manufacturer: Holman & Barnard


Description: stainless steel anchors

Notes: We propose to use all stainless steel anchors. At locations of banding and wall

cap, we will use an anchor pin. At locations of larger bands, soffits and


projections we will use a split-tail anchor installed at head joints.

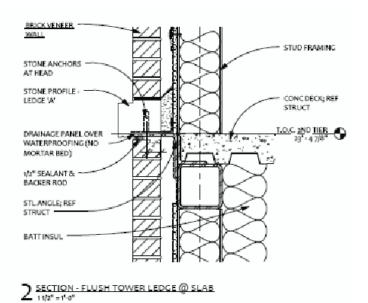



HB STAINLESS STEEL STONE ANCHORS

#406 STONE ANCHOR

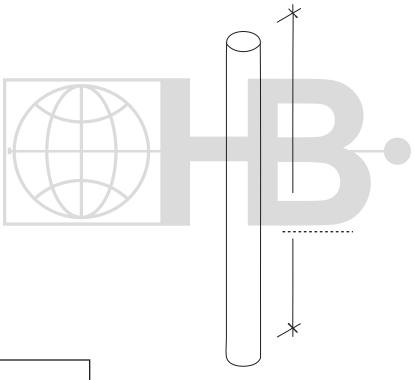

QUANTITY:

ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580)


DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH: TYPE 304 Stainless Steel TYPE 316 Stainless Steel H&B recommends the exclusive use of 304 co	DIAMETER: 3/16"/4.7 mm 3/8"/9.5 mm 1/4"/6.3 mm 1/2"/12.7 mm 5/16"/7.9 mm 5/8"/15.8 mm 3/8"/9.5 mm	☐ 3/4"/19 mm ☐ OTHER
PROJECT NAME: LOCATION: NOTES:	CONTACT INFO Name : Company: Phone: Email:	FAX:

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.



#439 STONE ANCHOR

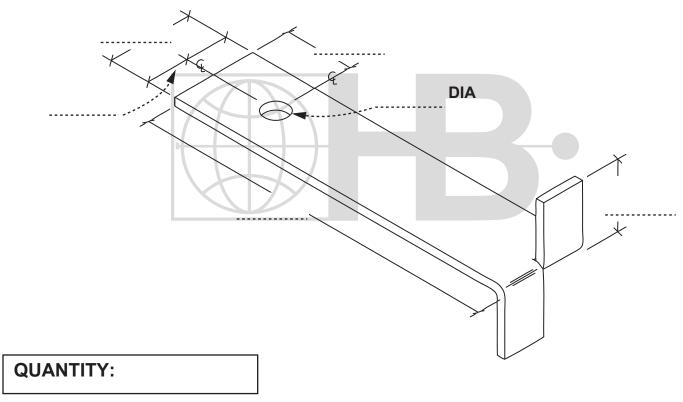

ST/ST Plate Min. Fy. = 45,000 p.s.i. (ASTM A666)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH:	THICKNESS:			
TYPE 304 Stainless Steel	12 ga./4.8 mm 3/16"/4.7 mm	3/8"/9.5 mm		
TYPE 316 Stainless Steel	1/8"/3.2 mm 1/4"/6.3 mm	OTHER		
H&B recommends the exclusive use of 304 or 316 ST/ST for stone anchorage.				
PROJECT NAME:	CONTACT INFO			
LOCATION:	Name :			
NOTES:	Company:			
	Phone:	FAX:		
	Email:			

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

